


Vs SERIES

FIXED INSTALLATION OUTDOOR SIGNAGE

640mm x 640mm Models

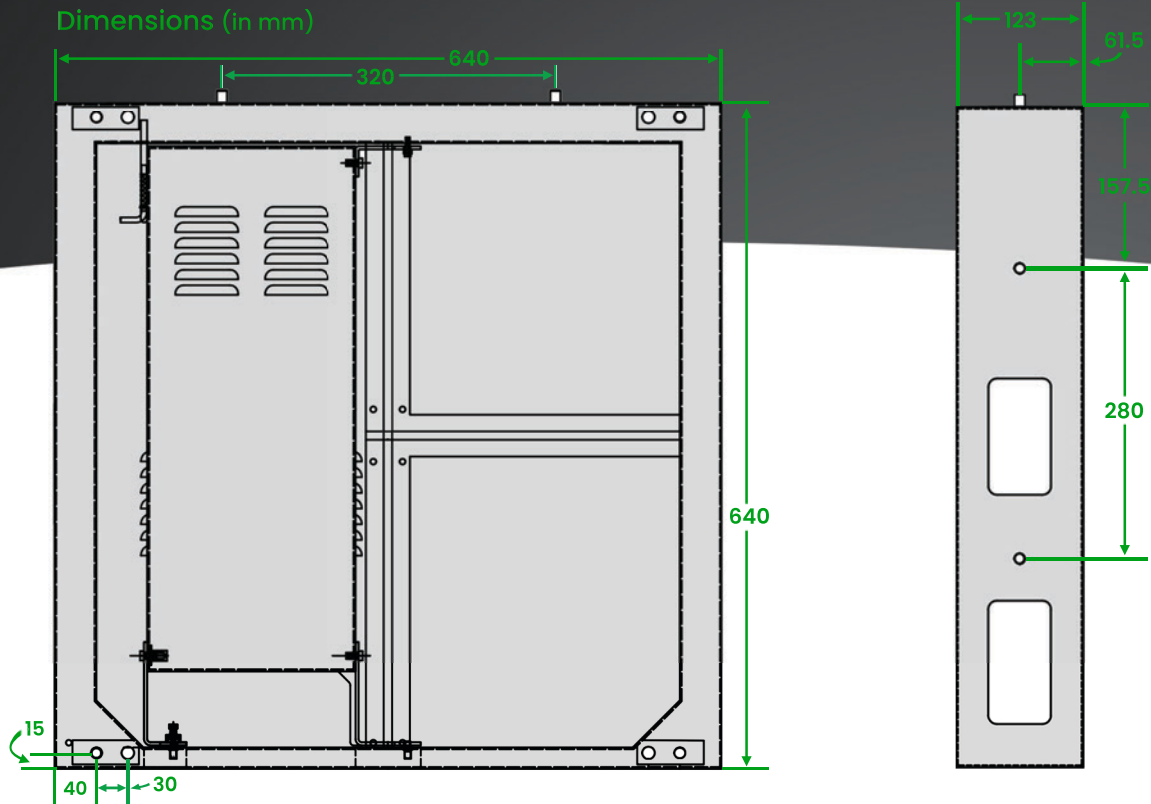

PIXEL PITCH	3.80mm	5.33mm	6.67mm	8.00mm	10.00mm
MODEL NAME	Vs3-6464	Vs5-6464	Vs6-6464	Vs8-6464	Vs10-6464
PIXELS PER CABINET	168 x 168 (28,224)	120 x 120 (14,400)	96 x 96 (9,216)	80 x 80 (6,400)	64 x 64 (4,096)
LED DRIVER IC	Chipone ICN2153	Chipone ICN2153	Chipone ICN2153	Chipone ICN2153	Macroblock MBI5124
CABINET SIZE	640mm (W) / 640mm (H) / 138mm (D)		640mm (W) / 640mm (H) / 138mm (D)		
CABINET MATERIAL	Aluminum		Aluminum		
CABINET WEIGHT	66 lbs		66 lbs		
MODULE SIZE	320mm x 320mm		320mm x 320mm		
LED TYPE	Nationstar Gold Wire		Nationstar Gold Wire		
RECEIVING CARD	NovaStar A8s		NovaStar A8s		
REFRESH RATE	≥3840 Hz		≥3840 Hz		
BRIGHTNESS	≥6000 NITS		≥6000 NITS		
VIEWING ANGLE	140° Horizontal & 70° Vertical		140° Horizontal & 70° Vertical		
SERVICE ACCESS	Front & Rear		Front & Rear		
IP RATING	IP65		IP65		
VOLTAGE RANGE	110-220 VAC 50-60Hz		110-220 VAC 50-60Hz		
AVG. POWER DRAW	.59A@208/1.11A@110	.58A@208/1.1A@110	.53A@208/1.0A@110	.54A@208/1.02A@110	.55A@208/1.05A@110
MAX POWER DRAW	1.68A@208/3.18A@110	1.67A@208/3.16A@110	1.56A@208/2.95A@110	1.59A@208/3.0A@110	1.61A@208/3.05A@110