


V^S SERIES

FIXED INSTALLATION OUTDOOR SIGNAGE

960mm x 640mm Models

Dimensions (in mm)

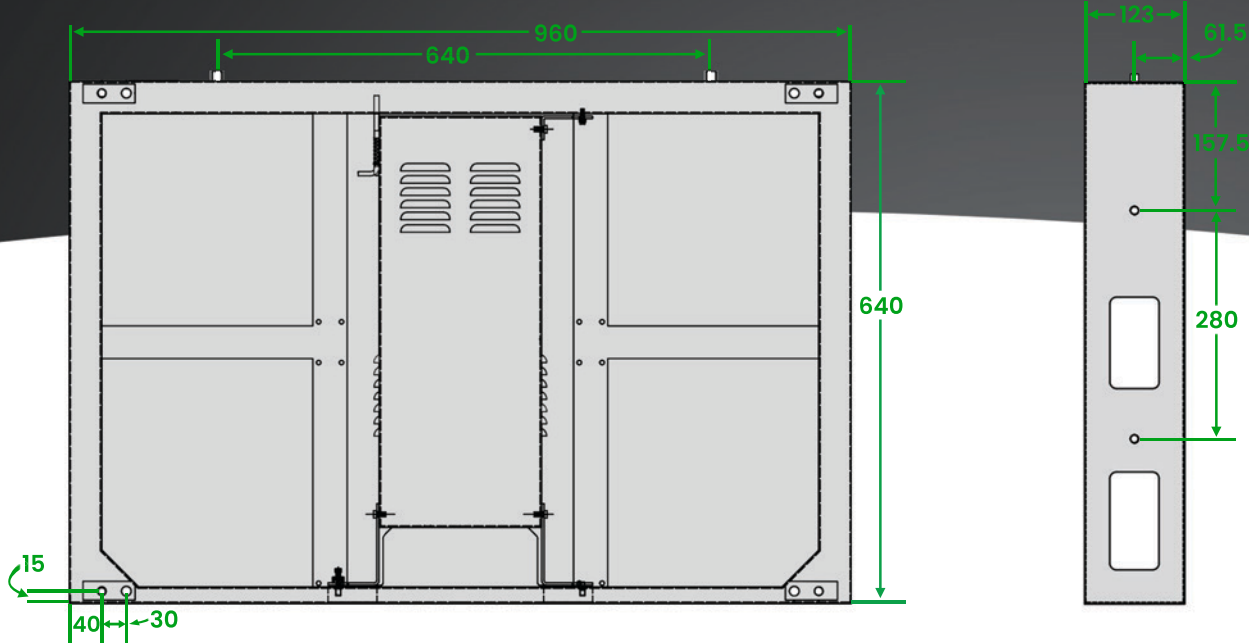

PIXEL PITCH	3.80mm	5.33mm	6.67mm	8.00mm	10.00mm
MODEL NAME	Vs3-9664	Vs5-9664	Vs6-9664	Vs8-9664	Vs10-9664
PIXELS PER CABINET	252 x 168 (42,336)	180 x 120 (21,600)	144 x 96 (13,824)	120 x 80 (9,600)	96 x 64 (6,144)
LED DRIVER IC	Chipone ICN2153	Chipone ICN2153	Chipone ICN2153	Chipone ICN2153	Macroblock MBI5124
CABINET SIZE	960mm (W) / 640mm (H) / 138mm (D)			960mm (W) / 640mm (H) / 138mm (D)	
CABINET MATERIAL	Aluminum			Aluminum	
CABINET WEIGHT	66 lbs			66 lbs	
MODULE SIZE	320mm x 320mm			320mm x 320mm	
LED TYPE	Nationstar Gold Wire			Nationstar Gold Wire	
RECEIVING CARD	NovaStar A8s			NovaStar A8s	
REFRESH RATE	≥3840 Hz			≥3840 Hz	
BRIGHTNESS	≥6000 NITS			≥6000 NITS	
VIEWING ANGLE	140° Horizontal & 70° Vertical			140° Horizontal & 70° Vertical	
SERVICE ACCESS	Front & Rear			Front & Rear	
IP RATING	IP65			IP65	
VOLTAGE RANGE	110-220 VAC 50-60Hz			110-220 VAC 50-60Hz	
AVG. POWER DRAW	.89A@208/1.68A@110	.88A@208/1.65A@110	.81A@208/1.53A@110	.83A@208/1.56A@110	.84A@208/1.59A@110
MAX POWER DRAW	2.53A@208/4.78A@110	2.50A@208/4.73A@110	2.31A@208/4.36A@110	2.35A@208/4.45A@110	2.4A@208/4.54A@110