


V^S SERIES

FIXED INSTALLATION OUTDOOR SIGNAGE

960mm x 960mm Models

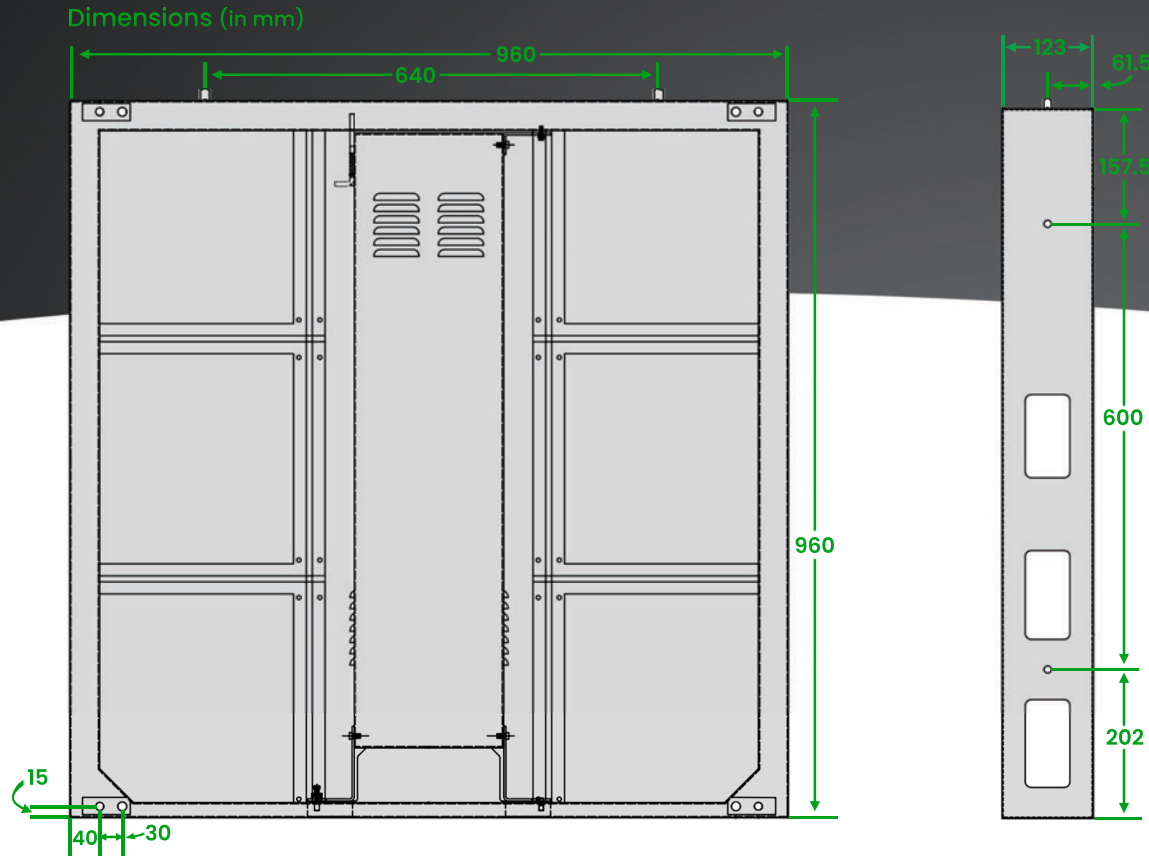

PIXEL PITCH	3.80mm	5.33mm	6.67mm	8.00mm	10.00mm
MODEL NAME	Vs3-9696	Vs5-9696	Vs6-9696	Vs8-9696	Vs10-9696
PIXELS PER CABINET	252 x 252 (63,504)	180 x 180 (32,400)	144 x 144 (20,736)	120 x 120 (14,400)	96 x 96 (9,216)
LED DRIVER IC	Chipone ICN2153	Chipone ICN2153	Chipone ICN2153	Chipone ICN2153	Macroblock MBI5124
CABINET SIZE	960mm (W) / 960mm (H) / 138mm (D)		960mm (W) / 960mm (H) / 138mm (D)		
CABINET MATERIAL	Aluminum		Aluminum		
CABINET WEIGHT	66 lbs		66 lbs		
MODULE SIZE	320mm x 320mm		320mm x 320mm		
LED TYPE	Nationstar Gold Wire		Nationstar Gold Wire		
RECEIVING CARD	NovaStar A8s		NovaStar A8s		
REFRESH RATE	≥3840 Hz		≥3840 Hz		
BRIGHTNESS	≥6000 NITS		≥6000 NITS		
VIEWING ANGLE	140° Horizontal & 70° Vertical		140° Horizontal & 70° Vertical		
SERVICE ACCESS	Front & Rear		Front & Rear		
IP RATING	IP65		IP65		
VOLTAGE RANGE	110-220 VAC 50-60Hz		110-220 VAC 50-60Hz		
AVG. POWER DRAW	1.33A@208 / 2.51A@110	1.31A@208 / 2.48A@110	1.20A@208 / 2.27A@110	1.23A@208 / 2.32A@110	1.26A@208 / 2.38A@110
MAX POWER DRAW	3.8A@208 / 7.18A@110	3.75A@208 / 7.09A@110	3.46A@208 / 6.55A@110	3.53A@208 / 6.68A@110	3.61A@208 / 6.82A@110